



## 1-800-BOLLARDS

## The Bollard Experts

| SELECT DESIRED MATERIAL: (6" NOMINAL SIZE) |  |      |  |  |
|--|--|------|--|--|
| FCSCT06040 SCH 40                          | STAINLESS STEE                                 | iL.  |  |  |
| FCSCT06040 SCH 40                          |  |      |  |  |
| SELECT DESIRED STAINI FINISH:              | SELECT DESIRED STAINLESS STEEL BOLLARD FINISH: |      |  |  |
| POLISHED #4 FINISH AS SPECIFIED            |  |      |  |  |
| SELECT DESIRED CARBO                       | ON STEEL BOLLAF                                | RD   |  |  |
| POWDERCOAL RAL#                            |  |      |  |  |
| AS SPECIFIED                               |  |      |  |  |
| SELECT DESIRED STAIN MATERIAL:             | LESS STEEL BOLL                                | .ARD |  |  |
| ☐ TYPE 304<br>☐ TYPE 316                   |  |      |  |  |
| SELECT DESIRED BOLLA                       | ARD CAP STYLE:                                 |      |  |  |
| DOME (SHOWN)                               |  |      |  |  |
| ☐ ☐ STANDARD FLAT                          |  |      |  |  |
| _ D SLOPED                                 | ſ  |      |  |  |
| LENS SELECTION                             | CLEAR  |      |  |  |
| CLEAR                                      |  |      |  |  |
| ☐ FROSTED ☐ INTERNAL FROSTED               |  |      |  |  |
| _  | f  |      |  |  |
| ☐ PARACLINE SILVER ☐ PARACLINE WHITE       | FROSTED  |      |  |  |
| LOUVER GREY                                |  |      |  |  |
| ☐ LOUVER WHITE                             |  |      |  |  |
| WATTAGE                                    | <u> </u>                                       |      |  |  |
| ☐ 5W 16LEDS 100mA                          | INTERNAL FROSTED                               |      |  |  |
| ☐ 8W 16LEDS 175mA                          |  |      |  |  |
| 12W 16LEDS 250mA                           |  |      |  |  |
| ССТ  | PARACLINE                                      |      |  |  |
| COOL                                       | PARACLINE                                      |      |  |  |
| □ NEUTRAL<br>□ WARM                        |  |      |  |  |
| VOLTAGE                                    |  |      |  |  |
| ☐ 120-277VAC                               | E E  |      |  |  |
| ☐120V                                      | LOUVER   |      |  |  |
|  |  |      |  |  |

|    | CDMMENTS   |
|----|--|
|    |  |
|    |  |
|    |  |
|    |  |
|    | SPECIFICATIONS   |
|    | HEIGHT: 36" 6.825"<br>DIAMETER: 6.825"<br>WALL THICKNESS: 0.280" |
|    | WALL THICKNESS: 0.280"   |
|    |  |
|    |  |
| 00 |  |
| 96 |  |

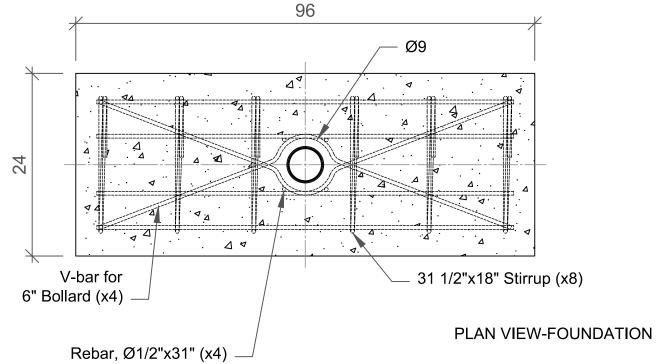



REVISIONS


LTR DESCRIPTION DATE

## 1-800-BOLLARDS

## The Bollard Experts

| SELECT DESIRED MATERIAL: (6" NOMINAL SIZE)           |   |  |  |
|--|---|--|--|
| FCSCT06040 SCH 40 STAINLESS STEEL                    |   |  |  |
| FCSCT06040 SCH 40 ASTM A-53 CARBON STEEL             |   |  |  |
| ☐ SELECT DESIRED STAINLESS STEEL BOLLARD FINISH:     |   |  |  |
| POLISHED #4 FINISH                                   |   |  |  |
| AS SPECIFIED   |   |  |  |
| SELECT DESIRED CARBON STEEL BOLLARD FINISH:          |   |  |  |
| POWDERCOAL RAL #                                     |   |  |  |
| AS SPECIFIED   |   |  |  |
| SELECT DESIRED STAINLESS STEEL BOLLARD MATERIAL:     |   |  |  |
| ☐ TYPE 304<br>☐ TYPE 316                             |   |  |  |
| SELECT DESIRED BOLLARD CAP STYLE:                    |   |  |  |
| DOME (SHOWN)   |   |  |  |
| STANDARD FLAT  |   |  |  |
| □ SLOPED   |   |  |  |
| LENS SELECTION CLEAR                                 | 1 |  |  |
| CLEAR  | 1 |  |  |
| ☐ FROSTED ☐ INTERNAL FROSTED                         |   |  |  |
| PARACLINE SILVER                                     | ı |  |  |
| PARACLINE WHITE FROSTED                              | l |  |  |
| ☐ LOUVER GREY  |   |  |  |
| _ LOUVER WHITE                                       |   |  |  |
| WATTAGE  | l |  |  |
| ☐ 5W 16LEDS 100mA INTERNAL FROSTED ☐ 8W 16LEDS 175mA | l |  |  |
| 12W 16LEDS 250mA                                     | 1 |  |  |
| CCT  |   |  |  |
| COOL PARACLINE                                       | 1 |  |  |
| □ NEUTRAL □ WARM                                     | f |  |  |
| VOLTAGE  |   |  |  |
| 120-277VAC   | ı |  |  |
| ☐ 120V   |   |  |  |
|  | ı |  |  |

|  | COMMENTS               |
|--|------------------------|
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  | ODEOTETO ATTUNO        |
|  | SPECIFICATIONS         |
|  | HEIGHT: 36"            |
|  | DIAMETER: 6.625"       |
|  | WALL THICKNESS: 0.280" |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |
|  |                        |

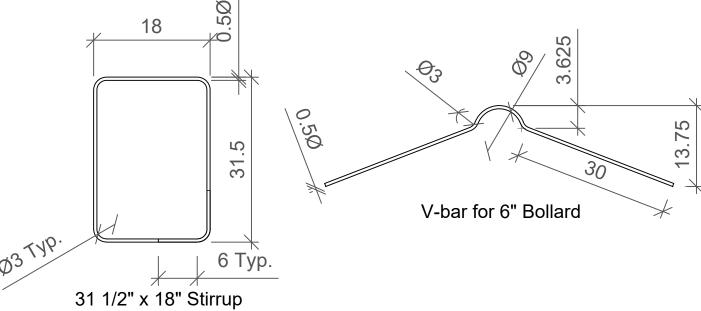

DOME (SHOWN) STANDARD FLAT SLOPED



|             |         | SERIES NUMBER  | XX-S060-XX                   | CAGE CODE         | SEE | DRAVING NUMBER |
|-------------|---------|--|------------------------------|-------------------|-----|----------------|
|             |         | PRODUCT FAMILY   | 20 MPH CRASH TESTED          | 6NQJ8             |     | 6" CT FIXED    |
|             |         | PRODUCT CLASS  | STANDARD OR CUSTOMER DEFINED | DRAWN BY:         |     | DRAVING REVI   |
|             |         | PRODUCT LINE   | BOLLARD                      | CHECKED BY        |     | SHEET: 1 DF 1  |
| APPLICATION |         | PREBUCT SUB LINE   | FIXED                        | APPROVED BY       | ń   | RELEASE DATE   |
| APPLI       | AITUN   | IN 1 000 DELLADES T                                      |                              | TITLE             |     |                |
| NEXT ASSY   | USED DN | 1-800-BL   | 1-800-BDLLARDS, Inc.         |                   |     |                |
|             |         | Invine, CA 92618 PHONE: 1-800-BOLLARDS BOLLARD, CT FIXED |                              |                   |     |                |
|             |         | PHONE: 1-800-BOLLARDS<br>VEB: VVV.1800BOLLARDS.COM       |                              | BOLLARD, CT FIXED |     |                |
|             |         | EMAIL: INFURISOBULLARDS.COM                              |                              |                   |     |                |

NOTES.
INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
I ROSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
I ROSTALLATION TO BE COMPLETED IN A REPORT OF THE PROPERTY OF THE PROPE