



1-800-BOLLARD

The Bollard Experts



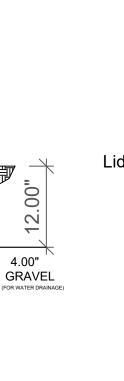

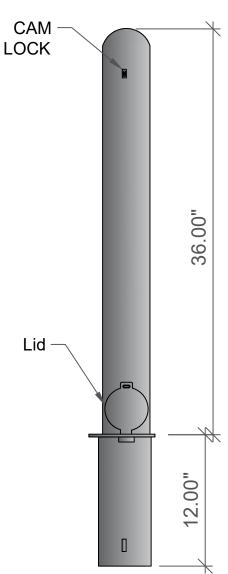




SPECIFICATIONS

HEIGHT: 36"
DIAMETER: 6.63"
WALL THICKNESS: 0.280" SCHED 40





CORE DRILL MINIMUM DIAMETER

DOME (SHOWN) STANDARD FLAT REVEAL









SLOPED

		SERIES NUMBER:	XX-2060-XX	CAGE CODE	SIZE	DRAVING NUMBER
		PRODUCT FAMILY	REMOVABLE	6NQJ8		REMOVABLE
		PREBUCT CLASS	STANDARD OR CUSTOMER DEFINED	DRAWN BY:		DRAVING REV
		PRODUCT LINE	BOLLARD	CHECKED BY:		SHEET: 1 OF 1
		PRODUCT SUB LINE	INTERNAL REMOVABLE	APPROVED BY: R		RELEASE DATE:
APPLICATION		1-800-BOLLARDS, Inc.		TITLE		
NEXT ASSY	USED ON	10 Hughes :	BOLLARD, INTERNAL REMOVABLE			
		Irvine, CA				
		PHONE: 1-80				
			IE1800BDLLARDS.CDM	l		

21.00"

END VIEW - FOUNDATION

DO NOT SCALE DRAWING. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING IS INTENDED FOR CONSTRUCTION.
MAY NOT BE USED FOR CONSTRUCTION.

NS INDICTION.

NS INDICTION.

SEP HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE